


slick®

DIGITAL VideoCamera**User Guide**
VC1120**In the box**

Requires 3 AAA batteries (not included)


Setting up your camera**Battery Installation**

- Open the battery cover by sliding it open with your thumb.
- Insert 3 alkaline "AAA" size batteries (not included) into the compartment as shown below.
- Close the battery cover.

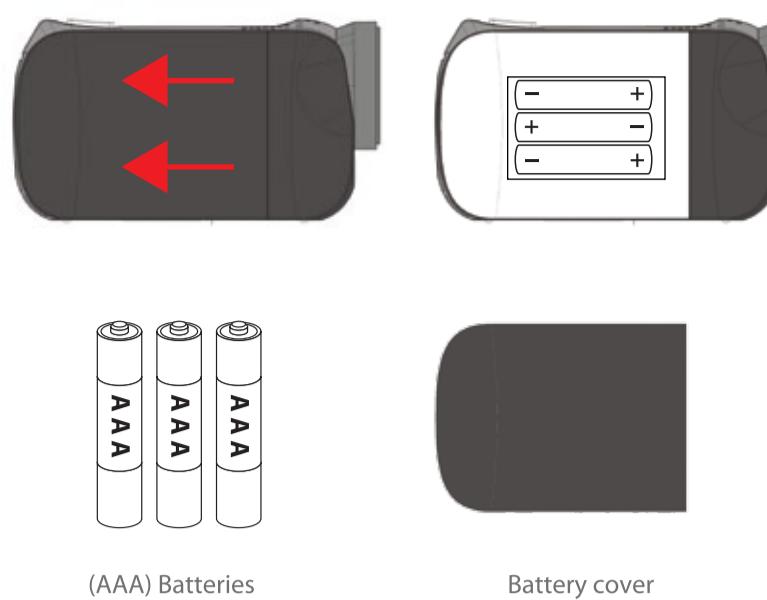**SD card installation**

This camera has no internal memory and requires an **SD / SDHC card (2 GB card included)** to record videos or take pictures. The camera can support SD/SDHC cards up to **32GB**. To install the SD card into the camera, follow the steps below:


- Turn off the camera.
- Insert the SD card into the card slot (as shown below) until it clicks and locks into place. Make sure the metal contacts are facing the camera control side.
- To remove the card, gently push it in until it pops out.

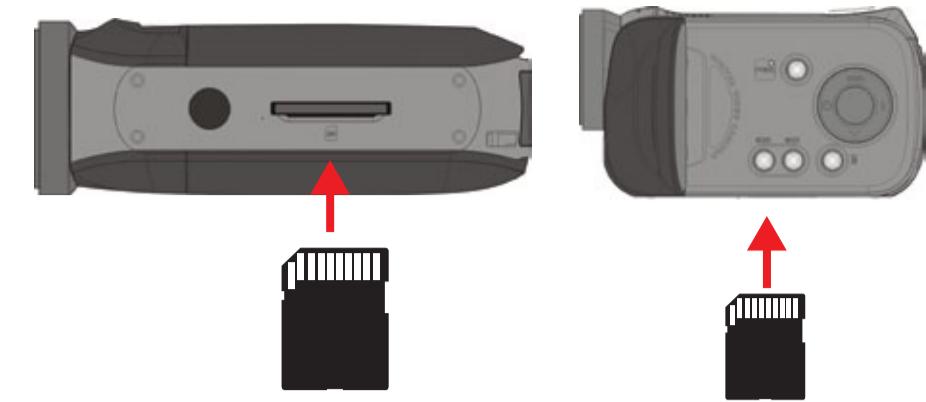




- A card can only be inserted one way; do not use force when inserting the card.
- Inserting or removing a card while camera is on may damage the card or camera.
- This camera supports SD or SDHC cards up to 32GB.
- When inserting a new SD card, be sure to format it.

Basic Operation**Turning the camera on/off**


- To turn the camera on, press and HOLD the [POWER] button until the display turns on.
- To turn the camera off, press and HOLD the [POWER] button until the display turns off.

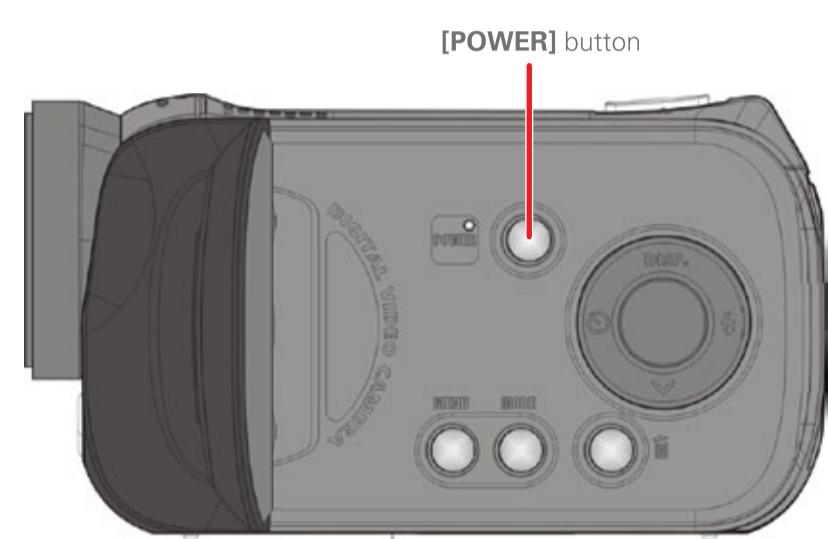

Note: This camera has an auto-shutoff feature (refer to System Settings>Power Save)

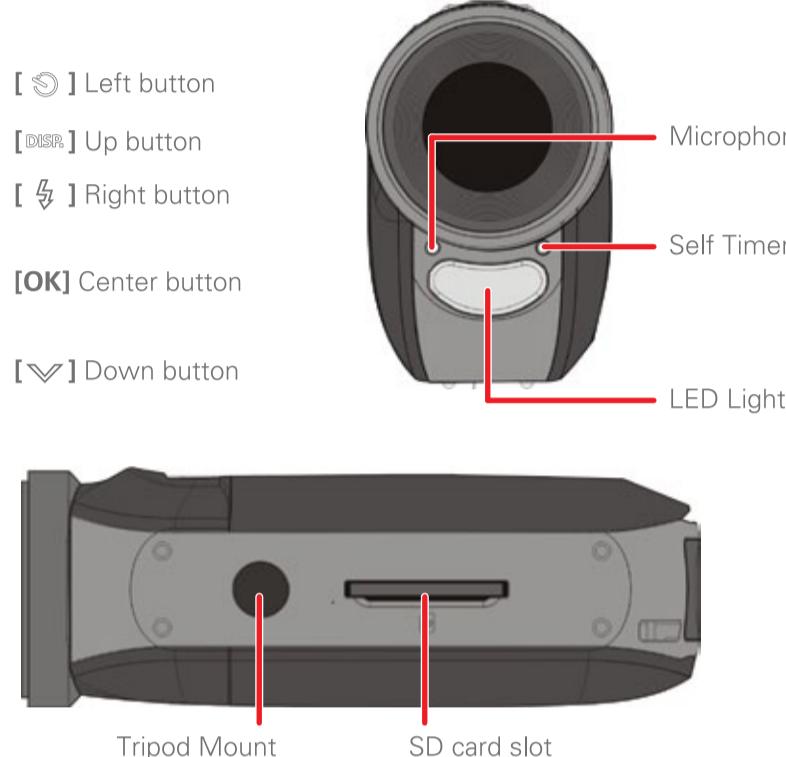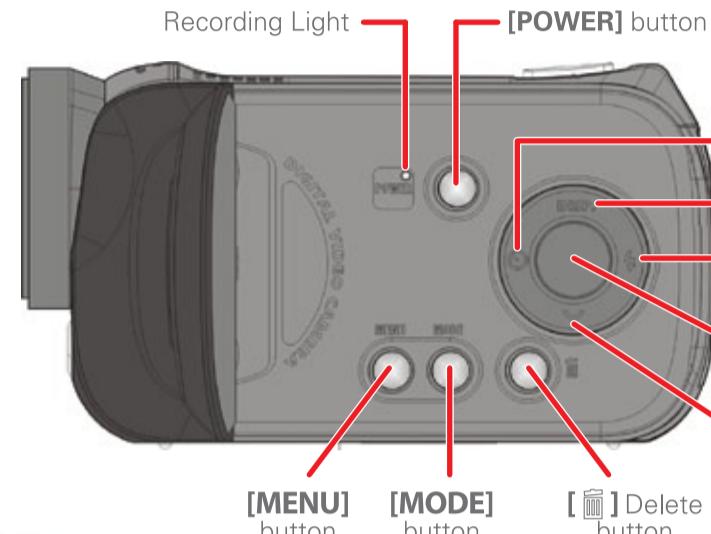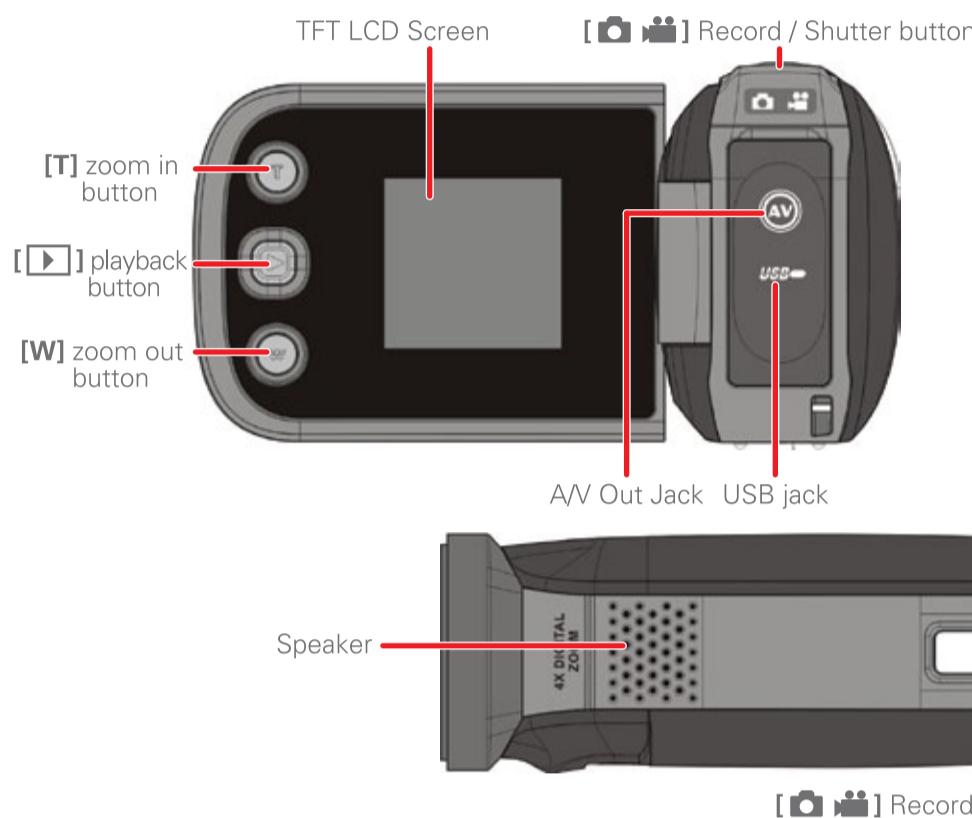Location of controls**Camera modes****Video Mode**

When you turn on the camera, the default mode is **Video Mode**. To switch between video and picture modes press the [MODE] button.

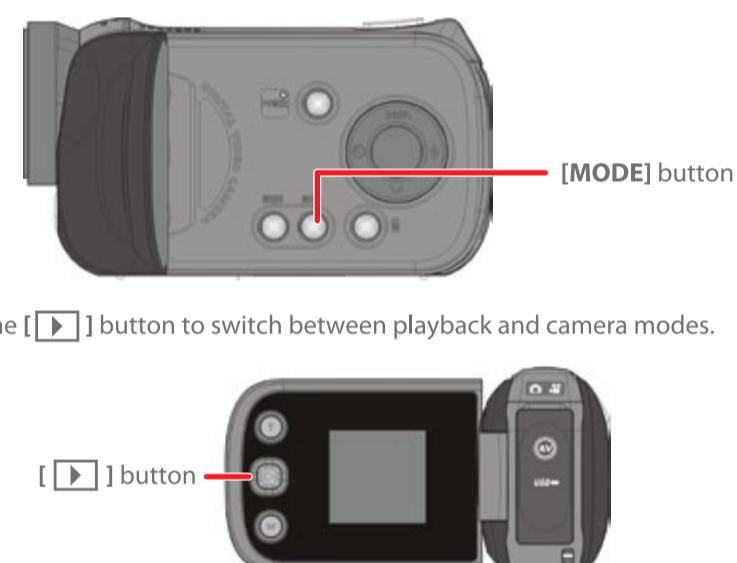

Press the [▶] button to switch between playback and camera modes.



The LCD Screen will display one of the following icons to show which mode the camera is in:

- Video Mode - Record videos
- Picture Mode - Take Pictures
- Playback Mode - Playback videos or view pictures

LCD Display Modes

1. When in picture or videos modes, press the [DISP] button to choose between three different LCD display modes.


• Information display mode - shows all video or picture information

• Display only mode - no information on screen

• No display mode - display completely off for battery saving

Picture Mode


- Make sure that an SD card is inserted into the camera.
- Turn on the camera, the **Standby Recording Screen** is displayed and the camera is in **Video Mode**.
- Press the [CAMERA] button, the Recording Screen is displayed and the camera is recording video (The recording indicator light is lit when recording).
- To stop recording, press the [CAMERA] button once again, and the display returns to the **Standby Recording Screen**.

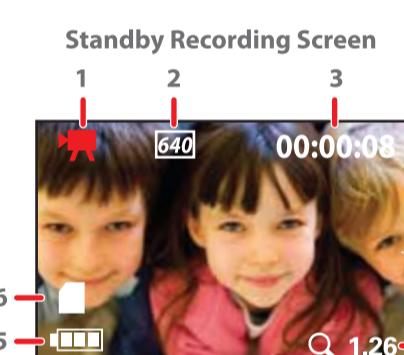

1. Video Mode Icon
2. Movie size
3. Recording time (video)
4. Zoom level
5. Battery Indicator
6. SD card indicator

Zoom

Use the [T] and [W] buttons to zoom in and out when recording video, taking photos or viewing still images.

**LED Light**

Press the [$\frac{1}{2}$] button to turn the LED light On or Off (LED will not work in playback mode).

**Deleting Files**

To delete the last video or picture taken, press the [] button then select yes or no. You can also browse and delete files on the camera (refer to **Playback Settings>Delete**).


1. Press the [] button to delete the last video or picture taken.

2. Use the [] button to select yes or no.

3. Press the [] button again to return to the Video Mode or Picture Mode.

Playback Mode

- Make sure that an SD card is inserted into the camera.
- Turn on the camera, and press the [MODE] button once to enter the **Picture Mode** (the **Picture Mode Screen** is displayed).
- Press the [CAMERA] button to take a picture.

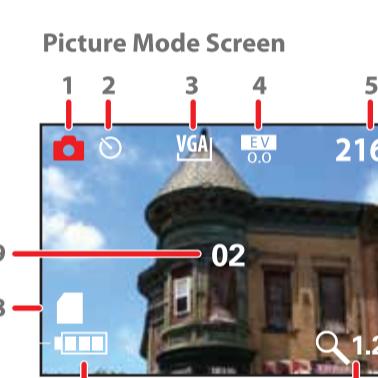


1. Picture Mode Icon
2. Self timer
3. Picture size (image quality)
4. Exposure mode
5. Number of photos that can be taken
6. Digital zoom indicator
7. Battery indicator
8. SD Card indicator
9. Self timer countdown

Self timer

- Press the [\circ] button to set up a self timer countdown.
- Press the [CAMERA] button to start the self timer countdown. The countdown will be shown at the center of the LCD screen and a picture will be taken when it reaches 0.
- You can set the self timer options between 2 seconds, 10 seconds, or a 3 frame burst (refer to **Picture Mode Settings>Capture Mode**)


Video Playback Mode

- Turn on the camera, and press the [] button to enter the **Playback mode**.
- Use the [\circ] or [$\frac{1}{2}$] button to select a video or picture (these are also the left and right buttons).
- If you select a video, press the [CAMERA] button to start or stop the playback.

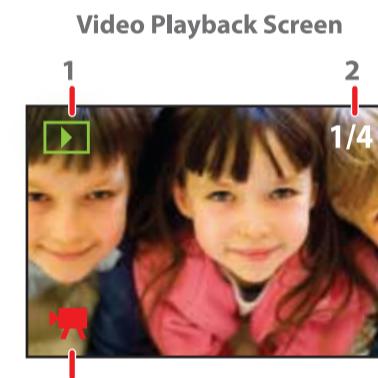

1. Playback Mode Icon
2. Number of saved files
3. File type (example is video file)

- If you select a picture, you can use the [T] and [W] buttons to zoom in and out. When zoomed in, you can use the [\circ], [\circ], [$\frac{1}{2}$], or [$\frac{1}{2}$] buttons to pan up, left, right, and down.

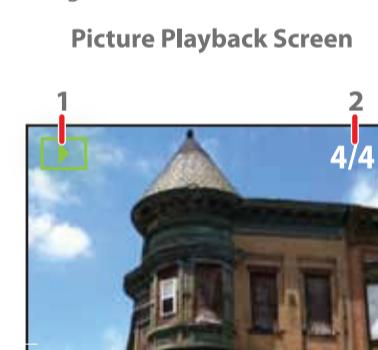

1. Playback Mode Icon
2. Number of saved files

- Press the [] button again to return to the **Video Mode** or **Picture Mode**.



System Settings

Press the [MENU] button within any mode and follow the steps below to access the **System Settings Screen**.

1. Use the [$\frac{1}{2}$] button to select [\wedge] **System Settings**.


2. Use the [\circ], [\circ], [$\frac{1}{2}$], or [$\frac{1}{2}$] buttons to select an option (these four buttons are also known as up, left, right and down), and confirm by pressing the [OK] button.

3. Press the [MENU] button to exit the **System Settings Screen**.

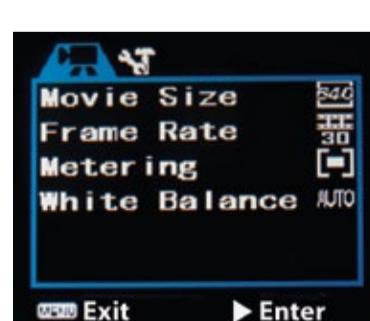Default Screen**System Settings Screen****Video Mode Settings**

1. Press the [MODE] button until the **Video Mode** is selected.
2. Press the [MENU] button to access the **Video Mode Settings Screen**.
3. Use the [\circ], [\circ], [$\frac{1}{2}$], or [$\frac{1}{2}$] buttons to select an option (these four buttons are also known as up, left, right and down), and confirm by pressing the [OK] button.

4. Press the [MENU] button to exit the **Video Mode Settings Screen**.

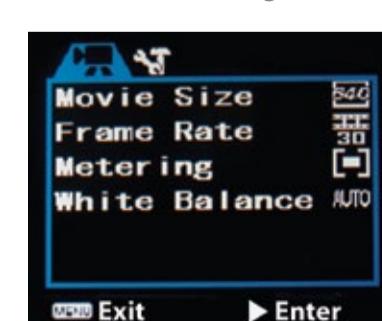
Video Mode Settings Screen

Select and confirm options

Picture Mode Settings

1. Press the [MODE] button until the **Picture Mode** is selected.
2. Press the [MENU] button to access the **Picture Mode Settings Screen**.
3. Use the [\circ], [\circ], [$\frac{1}{2}$], or [$\frac{1}{2}$] buttons to select an option (these four buttons are also known as up, left, right and down), and confirm by pressing the [OK] button.

4. Press the [MENU] button to exit the **Picture Mode Settings Screen**.

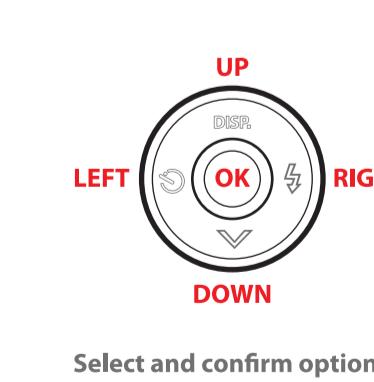Picture Mode Settings Screen

Select and confirm options

Playback Settings

1. Press the [] button to enter **Playback Mode**.
2. Press the [MENU] button to access the **Playback Mode Settings Screen**.
3. Use the [\circ], [\circ], [$\frac{1}{2}$], or [$\frac{1}{2}$] buttons to select an option (these four buttons are also known as up, left, right and down), and confirm by pressing the [OK] button.

4. Press the [MENU] button to exit the **Playback Mode Settings Screen**.

Playback Mode Settings Screen

Select and confirm options

System Settings Options**SOUNDS**

shutter (on/off), start-up (on/off), Beep (on/off), Volume (0/1/2/3)

POWER FREQUENCY

50Hz / 60Hz

(The Camera's default setting is 60hz for the USA and North America)

POWER SAVE

Select 1, 3, or 5 minutes. To conserve battery power, the camera will shut off if no buttons are pressed within the selected time.

DATE & TIME

Set the camera's date and time.

LANGUAGE

Set the camera's language.

TV OUT

PAL / NTSC (The camera's default setting is NTSC for the USA and North America)

USB

MSDC or PCCAM (Only select PCCAM when you would like to use the camera as a webcam then be sure to change back to MSDC when using as camera).

START IMAGE

Choose a picture for the camera's startup screen.

FORMAT

Format the SD/SDHC card (Deletes everything on the card).

RESET ALL...

Reset the camera's settings to factory default.

Video Mode Settings Options**MOVIE SIZE**

· 640X480 (Higher quality video/shortest recording time)

· 320X240 (lower quality video/shortest recording time)

FRAME RATE

· 30 Frames Per Second (Higher quality video/shorter recording time)

· 15 Frames Per Second (Lower quality video/shorter recording time)

METERING

Center / Multi / Spot

WHITE BALANCE

· Auto / Daylight / Cloudy / Fluorescent / Tungsten

Picture Mode Settings Options**RESOLUTION**

3M (2048x1536) / 1M (1280x960) / VGA (640X480)

(Higher picture resolution takes up more space on the card)

QUALITY

Super fine / Fine / Normal

METERING

Center / Multi / Spot


WHITE BALANCE

Auto / Daylight / Cloudy / Fluorescent / Tungsten

EXPOSURE

Connecting the camera

Connecting your camera to a TV

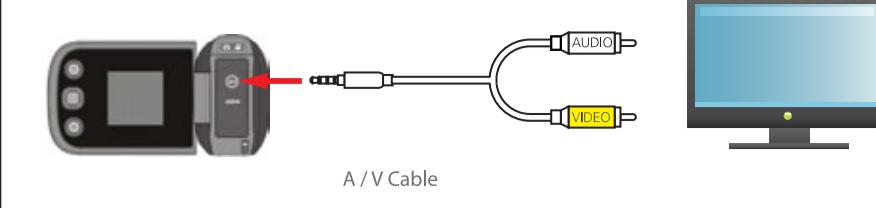

To watch videos and view pictures on a television, please follow the instructions below:

1. Connect the black plug of the provided A / V Cable to your camera's A / V OUT jack.
2. Connect the white and Yellow plugs to your television's matching video (yellow) and audio (red or white) inputs.
3. Turn on the camera- the display will turn on briefly and shut.
4. Click on your television's "Input" button until you see the live feed from the camera.
5. Press the [] button to enter the **Playback Mode**.
6. Use the [] button to select a video file, and press the [OK] button to begin or stop playback.


OR

Select a JPG picture file and press the [MENU] button and select "Slide Show" from the

Playback Mode Settings Screen. Press the [] button and select "Start" to begin


a slideshow of all the pictures stored on the camera's SD card.

Connect the camera to a computer

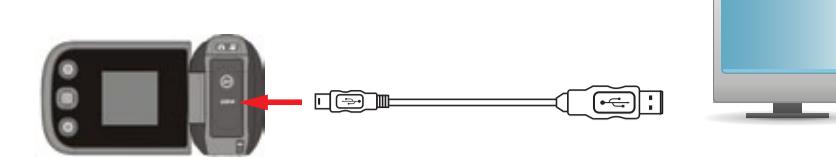


To edit or upload your videos and pictures, you must first transfer them to your computer, and use the provided ArcSoft® Media Impression software to manage, view, edit and share your videos and pictures.


1. Make sure the camera is turned off, and that an SD / SDHC card is inserted in the camera before connecting it to your computer.
2. Insert the smaller end of the USB cable into the camera's USB port.
3. Connect the larger end of the USB cable into your computer's USB port.
4. Turn ON the camera.
5. Look for your camera by clicking on "My Computer", it should usually appear as "Removable Disk". Select a file on your camera, and simply move it into your computer (we recommend copying the files into the "My Videos" or "My Pictures" folder of your computer) in the usual way (drag-and-drop, copy-paste). OR open the ArcSoft® Media Impression software to easily locate your camera and transfer, view, edit, and upload your video and picture files (see "ArcSoft® Media Impression").
6. Before disconnecting the camera, click on the "Safely Remove Hardware" icon usually located on the lower right corner of your desktop.

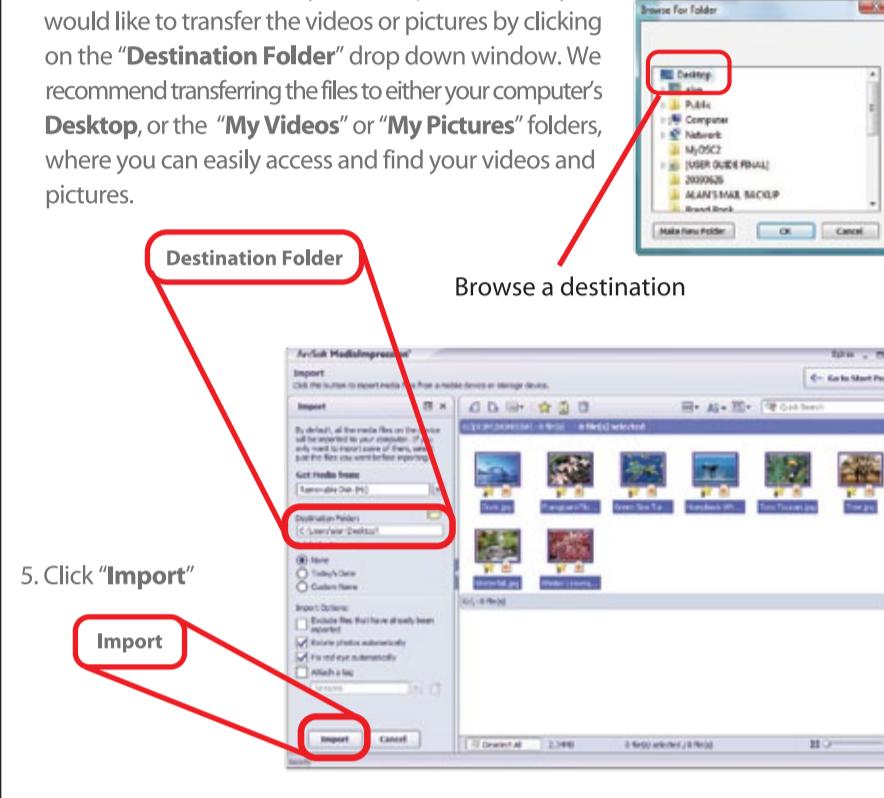

6. If you wish to delete the original files from the camera select "Delete Original Files", otherwise just click "Done".

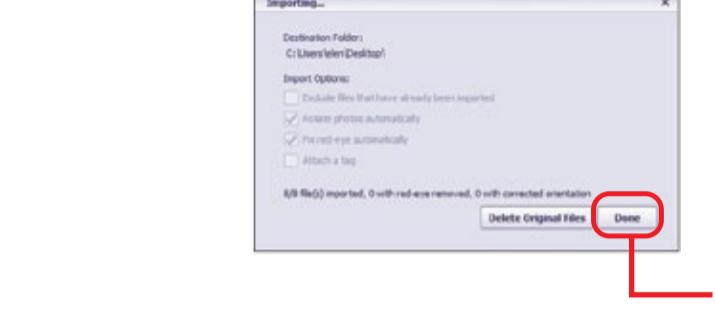


Viewing videos on your computer

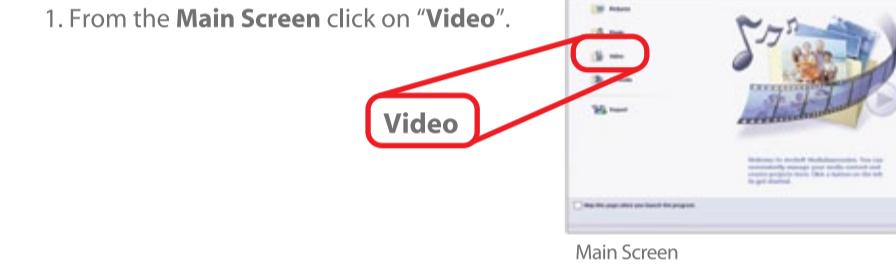

ArcSoft® Media Impression

Installing

Install the included ArcSoft® Media Impression software before connecting the camera to your computer. With this software you will be able to manage, view, edit, transfer, and easily upload / share your videos and pictures. Follow the instructions below to install the Media Impression software onto your computer.

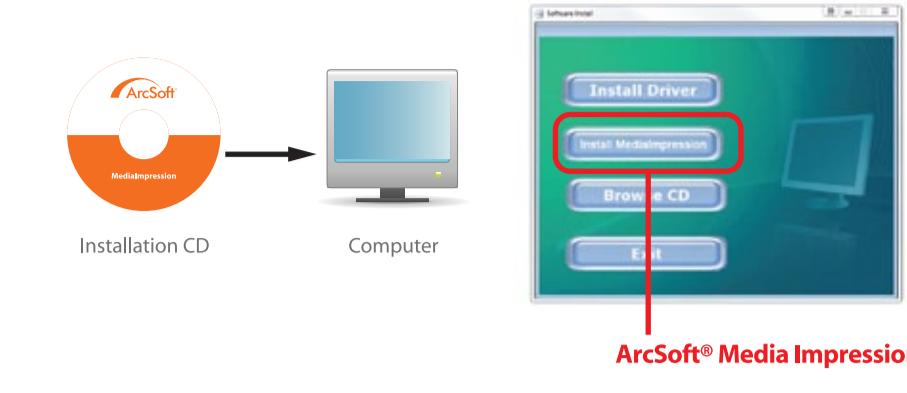

1. Insert the provided CD into the CD-ROM drive of your computer, and click on "ArcSoft® Media Impression".
2. Click "Install".
3. Click "Next" when prompted and "Finish".
4. To open Media Impression, click on the Media Impression icon on your Desktop.

Transferring videos and pictures from the camera to your computer


1. Open Media Impression.

2. Click "Import".



Uploading videos to YouTube™

1. From the Main Screen click on "Video".

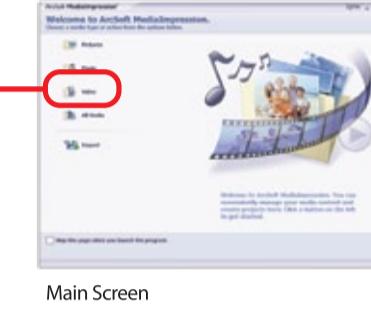

2. Select a video.




Webcam Feature

Installing the WebCam Driver

Your Digital Video Camera may also be used as a webcam. This feature is quite useful if you would like to utilize the video function on Skype™ and other similar applications. To use the camera as a webcam you must first install the **WebCam Driver**. Follow the instructions below to install the driver and use the webcam feature.

1. Insert the provided CD into the CD-ROM drive of your computer, and click on "WebCam Driver".
2. Click "Next".
3. Click "Install" and "Finish" when prompted.

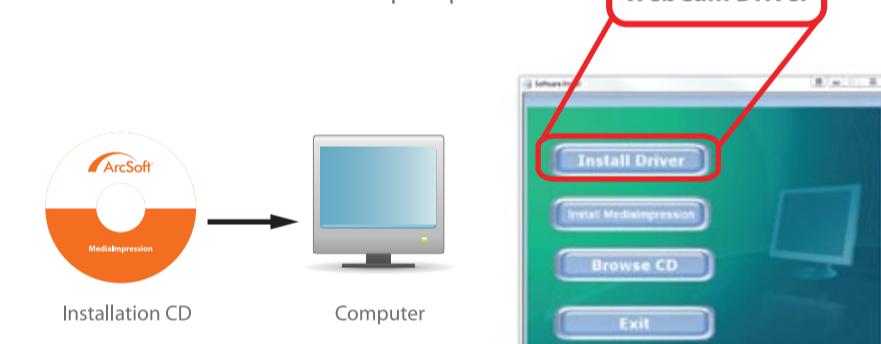

FCC information

FCC Part 15:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


NOTE: This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Using Your camera as a webcam

1. Turn on the camera, and press the [MENU] button.
2. Press the [] button and select [] to enter the **System Settings Screen**.
3. Use the [] button to scroll down to "USB" and press the [] button.
4. Select "PCCAM" and press the [OK] button.
5. Press the [MENU] button once again to exit the **System Settings Screen**.
6. When you connect the camera, it will be recognized by your computer as a webcam.

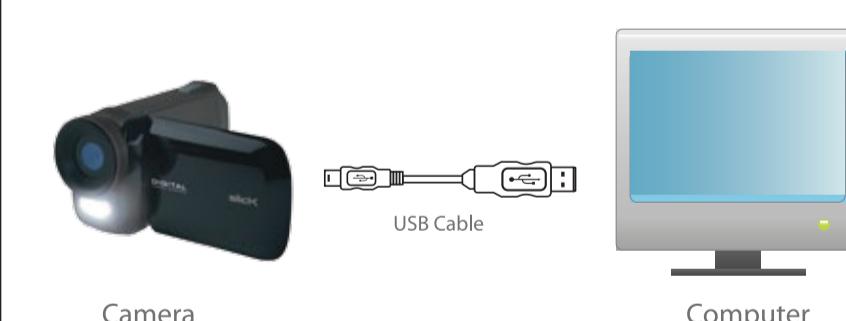

We recommend using a mini tripod when using your camera as a webcam. When you et the camera to "PCCAM", you will not be able to access the files on the SD card. When connecting the camera to your computer, Make sure to set it back to the default setting by selecting "USB" and then "MSDC" in System Settings.

Safety Precautions

Always follow these basic safety precautions when using your camera. This will reduce the risk of product damage and personal injury.

- Do not disassemble, repair or modify the camera by yourself. Refer servicing to qualified personnel.
- If the LCD display breaks, do not touch the glass or liquid, and contact customer support.
- The use of a NON-RECOMMENDED accessory may cause fire, electric shock, or injury. For approved accessories, please contact customer support.

• Keep the camera away from direct sunlight and any direct heat source.

• Do not expose the camera to rain or moisture.

• Avoid using the camera in dry environments to avoid static.

• Never apply heavy impact on the player, or place it on a magnet.

• When connecting the camera to a computer or TV, route the cable so that people and pets are not likely to trip over it.

• Clean only with a dry cloth. Make sure the player is turned off before cleaning. Do not use a liquid cleanser.

Important Battery Precautions

• Use only the type of battery specified in this user manual.

• Batteries may present a risk of fire, explosion, or chemical burn if abused. Do not try to charge a battery that is not intended to be recharged.

• Do not dispose of the battery (ies) in a fire. They may explode. Check with local codes for disposal instructions.

• Non-rechargeable batteries, such as alkaline batteries, may leak if left in your product for a long period of time. Remove the batteries from the product if you are not going to use it for a month or longer.

• If your product uses more than one battery, do not mix different types of batteries. Make sure you replace the old, with all new batteries. Mixing different types of batteries or inserting them incorrectly, may cause them to leak.

• In the event that the battery is leaking, do not handle the device with your bare hands. Contact the service center for help since the liquid may remain in the player. If your body or clothes had contact with the battery/liquid, wash it off thoroughly with water. Also, if some liquid gets into your eyes, do not rub your eyes but immediately wash them with clean water and consult a doctor.

• Please help to protect the environment by recycling or disposing of batteries according to federal, state, and local regulations.

Limited Warranty

In the unlikely event that this product is defective, or does not perform properly, you may within ninety (90) days from your original date of purchase return it to the authorized service center for repair or exchange.

TO OBTAIN WARRANTY SERVICE:

- Provide proof of the date of purchase within the package (Dated bill of sale).
- Prepay all shipping costs to the authorized service center, and remember to insure your return.
- Include a return shipping address (no P.O. Boxes), a telephone contact number, and the defective unit within the package.
- Describe the defect or reason you are returning the product.

Your product will be repaired or replaced, at our option, for the same or similar model of equal value if examination by the service center determines this product is defective. Products received damaged as a result of shipping will require you to file a claim with the carrier.

My videos are jumpy or shaky

- Use a mini tripod.
- Adjust the video / picture quality to a higher setting.

The shipping address of the authorized service center is:

Southern Telecom, Inc.
Attention: Customer Service (2nd Floor)
14-C 53rd Street
Brooklyn, NY 11232

Should you have any questions or problems concerning this product, please contact our customer service department at:

Customer Support:
Call 1-877-768-8483 (Toll Free)
Email: cs@southerntelecom.com

Monday - Thursday: 9AM - 5PM (EST)
Friday: 9AM - 3PM (EST)

www.southerntelecom.com

Warranty service not provided

This warranty does not cover damage resulting from accident, misuse, abuse, improper installation or operation, lack of reasonable care, and unauthorized modification. This warranty is voided in the event any unauthorized person opens, alters or repairs this product. All products being returned to the authorized service center for repair must be suitably packaged.

Limitation of Warranty:

• THE WARRANTY STATED ABOVE IS THE ONLY WARRANTY APPLICABLE TO THIS PRODUCT. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. NO VERBAL OR WRITTEN INFORMATION GIVEN BY SOUTHERN TELECOM, INC. ITS AGENTS, OR EMPLOYEES SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY.

• REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER. SOUTHERN TELECOM, INC. SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT OR ARISING OUT OF ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT. THIS DISCLAIMER OF WARRANTIES AND LIMITED WARRANTY ARE GOVERNED BY THE LAWS OF THE STATE OF NEW YORK, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED TO THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE.

Some states do not allow the exclusion nor limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you also may have other rights that vary from state to state.

slick

Slick is a registered trademark of Southern Telecom, Inc.
www.slickusa.com

YouTube™ is a registered trademark of YouTube, LLC.

This product is not affiliated with, or endorsed by YouTube™.

ArcSoft and Media Impression are trademarks of ArcSoft, Inc.

SD (The SD logo is a trademark of the SD Card Association)

Other trademarks and trade names are those of their respective owners.

All screen images are simulated.

© 2011 All rights reserved.